




PRODUCT DATA SHEET

SST-204-125ADAP-IND

Rapid Self-Seal Thermal 204x60mm to 125mmØ Straight Adaptor

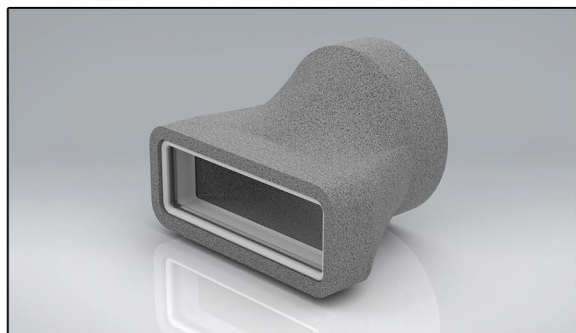

MANUFACTURER: VERPLAS LTD

PART NUMBER: SST-204-125ADAP-IND

SIZE: 204x60mm

FOR USE WITH: VERPLAS THERMAL 204 & 125mmØ

BOX QUANTITY: 8

INDIVIDUAL WEIGHT: 180g

COLOUR: Grey

MIN OPERATING TEMP: -15°C

MAX OPERATING TEMP: +60°C

THERMAL RESISTANCE: 0.666 m²K/W

THERMAL CONDUCTIVITY: 0.03 W/mK

SPECIFICATION DETAILS

The Verplas Self-Seal Thermal SST-204-125ADP-IND insulated fitting is manufactured from graphite impregnated expanded polystyrene (EPS) with a minimum density of 25kg/m³ and provides a free area of 12,232 mm² to 12,273 mm². The SST-204-125ADAP-IND is supplied with self-seal female couplings that allow the ducting fitted with a Duct to Fitting Connector to be plugged into the fitting apertures with a push, click and lock mechanism.

The Self-Seal female couplings are manufactured from prime High Impact Polystyrene and a Thermoplastic Elastomer Dynamic Sealing Gasket.


The EPS material is fully tested to meet the thermal conductivity requirements of BASF-EN13163 to assist with the prevention of condensation and is flame retardant to DIN 4102-B1.

The patented push, click and lock mechanism provides a low leakage solution which exceeds the requirements set out in DW/143 Class A leakage test and DW/154 ductwork standards.

The Self-Seal Thermal is compliant with the requirements outlined in the Energy performance characteristics database for use in SAP with MVHR and MEV supply and extract ventilation systems.

AIRFLOW	RESISTANCE	
	125mm -204x6mm	204x60mm -125mm
8 l/s	0.51 pa	0.47 pa
13 l/s	1.29 pa	1.20 pa
21 l/s	3.26 pa	3.06 pa
30 l/s	6.55 pa	6.15 pa
60 l/s	25.72 pa	24.04 pa

PERFORMANCE CURVE
204x60mm - 125mmØ

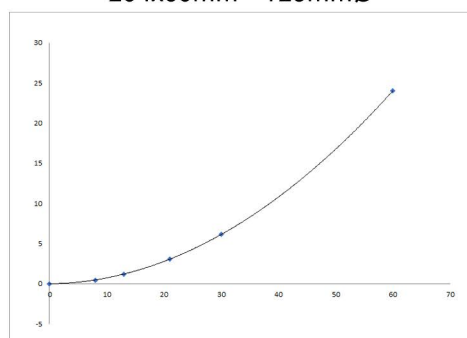

Pressure
Loss
Pascals
(Pa)

AIRFLOW RATE
(L/S)

Associated Ancillaries

SST-204-2M-IND 204x60mm Rapid Self-Seal Thermal 2m Flat Channel
SST-204-45VB-IND 204x60mm Rapid Thermal Self-Seal 45° Vertical Bend
SST-204-90HB-IND 204x60mm Rapid Self-Seal 90° Horizontal Thermal Bend



Scan Here
to find out
how quick
it is to install

