


# PRODUCT DATA SHEET

## VKC712

234x29mm Double Airbrick Adaptor

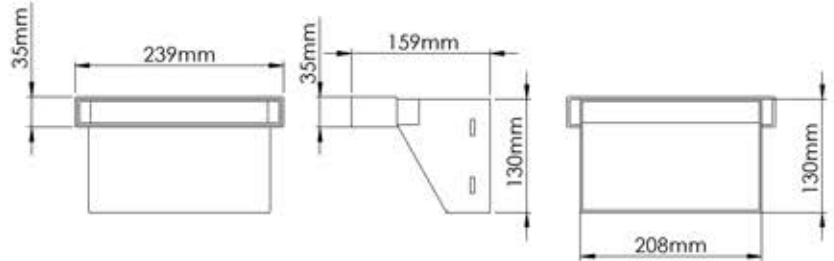

<b>MANUFACTURER:</b>	<b>VERPLAS LTD</b>
<b>PART NUMBER:</b>	<b>VKC712</b>
<b>SIZE:</b>	<b>234x29mm</b>
<b>FOR USE WITH:</b>	<b>VERPLAS SYSTEM 225</b>
<b>BOX QUANTITY:</b>	<b>5</b>
<b>INDIVIDUAL WEIGHT:</b>	<b>300g</b>
<b>COLOUR</b>	<b>White</b>
<b>MIN OPERATING TEMP</b>	<b>-15°C</b>
<b>MAX OPERATING TEMP</b>	<b>+60°C</b>

### SPECIFICATION DETAILS


The VKC712 234x29mm Double Airbrick Adaptor is manufactured from (white) High Impact Polystyrene.

VKC712 is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VKC712 has been designed for use with Verplas System 225 Rectangular.

AIRFLOW	RESISTANCE
8 l/s	1.20 Pa
13 l/s	2.88 Pa
21 l/s	6.81 Pa
30 l/s	13.04 Pa
60 l/s	45.63 Pa

### PERFORMANCE CURVE

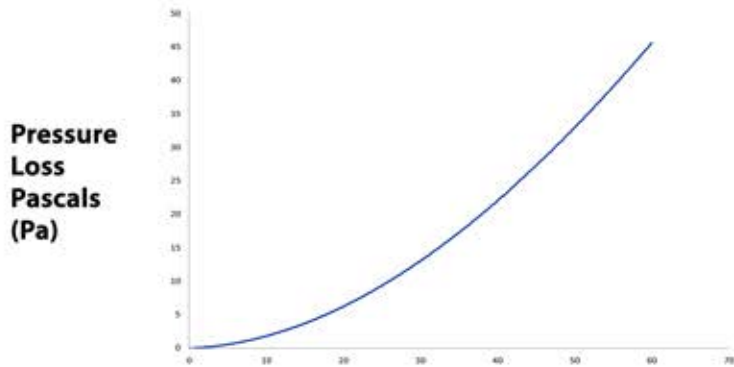

### Associated Ancillaries

**VKC707**

234x29mm  
Rectangular 2m  
Flat Channel

**VKC704**

White Airbrick  
Grille

**VKC711**

234x29mm 45°  
Horizontal Bend

Air Flow rate  
(l/s)

View the Full Range

[Sales@Verplas.co.uk](mailto:Sales@Verplas.co.uk)

[www.Verplas.co.uk](http://www.Verplas.co.uk)

+44 (0) 1202 825898

Scan Me

