



# PRODUCT DATA SHEET

## VKC5633G

### DOUBLE AIRBRICK ADAPTOR C/W GRILLES

- W** RAL9010
- B** RAL8017
- BE** RAL1001
- T** RAL2001

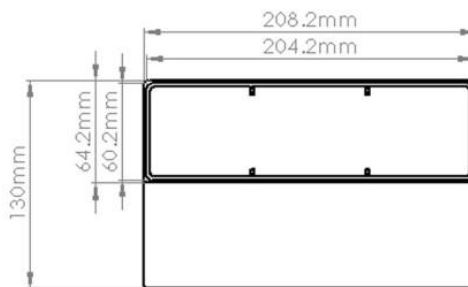

### SPECIFICATION DETAILS

The VKC5633G 204x60mm Rectangular Double Airbrick Adaptor with Grilles is manufactured from (white) High Impact Polystyrene and has a minimum free area of 15,360mm<sup>2</sup>. It has a female adaptor for connection outside of the System 204 duct.

The VKC5633G is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

VKC5633G is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VKC5633G has been designed for use with Verplas System 204.

#### MAX/MIN OPERATING TEMPERATURES

+ 60°C to - 15°C

**Manufacturer:**

Verplas Ltd

**Part Number:**

VKC5633G

**Size:**

204mm x 60mm

**For use with:**

Verplas System 204

**Box quantity:**

5


**Individual Weight:**

258g

**Colour:**

White, Brown, Beige & Terracotta

### PERFORMANCE CURVE

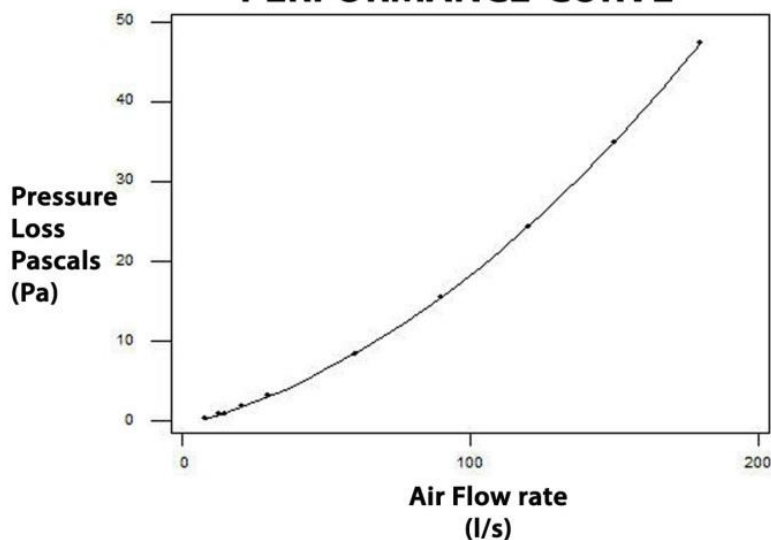

#### AIRFLOW

#### RESISTANCE

8 l/s

0.40 pa

13 l/s

0.88 pa

21 l/s

2.00 pa

30 l/s

3.30 pa

60 l/s

8.40 pa

120 l/s

24.40 pa

### Associated Ancillaries

