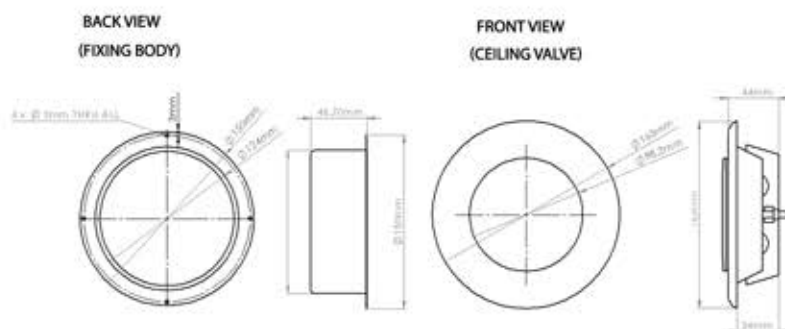


# PRODUCT DATA SHEET

## MW124FRE

### FIRE RATED EXTRACT VALVE

**W** RAL9010


## SPECIFICATION DETAILS

The MW124FRE 125mm diameter Round Fire Rated Extract Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 125 duct.

The MW124FRE Extract Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The MW124FRE incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 2014 with 60 minute rating for ceilings.

MW124FRE has been designed for use with Verplas System 125 Round.

<b>Manufacturer:</b>	Verplas Ltd
<b>Part Number:</b>	MW124FRE
<b>Size:</b>	125mm Diameter
<b>For use with:</b>	Verplas System 125
<b>Box quantity:</b>	7
<b>Individual Weight:</b>	390g
<b>Colour:</b>	White

**FIRE RATING**
**60 Minutes**

## PERFORMANCE CURVE

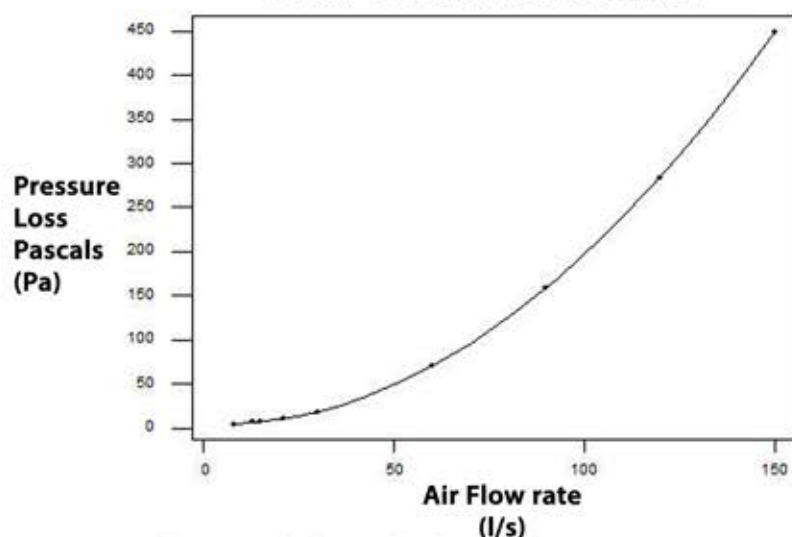

\*Pressure losses with Control Disk 10mm open

## Associated Ancillaries



AIRFLOW	RESISTANCE
8 l/s	4.20 pa
13 l/s	6.90 pa
21 l/s	10.70 pa
30 l/s	17.50 pa
60 l/s	71.70 pa
120 l/s	284.00 pa