


PRODUCT DATA SHEET

MW155FRS

FIRE RATED WHITE METAL CEILING AIR SUPPLY VALVE


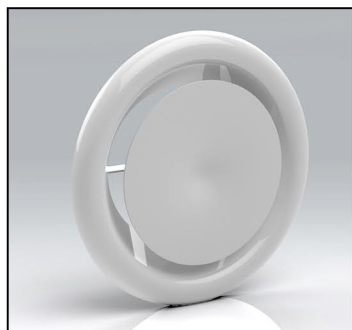


BEFORE A FIRE



SEALED AFTER
A FIRE

☐ RAL9016

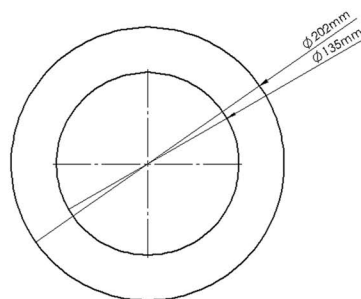

MANUFACTURER:	VERPLAS LTD
PART NUMBER:	MW155FRS
SIZE:	150mmØ
FOR USE WITH:	VERPLAS SYSTEM 150
BOX QUANTITY:	7
INDIVIDUAL WEIGHT:	510g
COLOUR	White
FIRE RATING	60 Minutes

SPECIFICATION DETAILS

The MW155FRS 150mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 150 duct.

The MW155FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The MW155FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2:2014 with 60 minute rating for ceilings.

MW155FRS has been designed for use with Verplas System 155 Round.

AIRFLOW RESISTANCE

8 l/s	2.00 pa
13 l/s	3.00 pa
21 l/s	7.00 pa
30 l/s	14.50 pa
60 l/s	57.40 pa
120 l/s	227.00 pa

PERFORMANCE CURVE

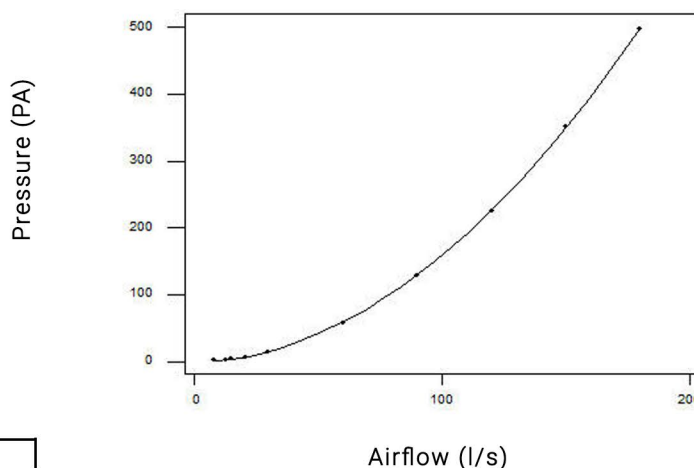

Associated Ancillaries

VKC673
150mmØ 2m
Round Pipe

VKC661
150mmØ Round
Wall Plate

VKC360
150mmØ 90°
Round Elbow Bend

