
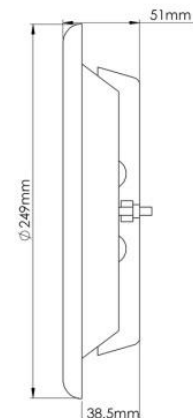


PRODUCT DATA SHEET

MW204FRE

FIRE RATED EXTRACT VALVE

W RAL9010



SPECIFICATION DETAILS

The MW204FRE 200mm diameter Round Fire Rated Extract Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside 200mm Round Duct.

The MW204FRE Extract Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.

The MW204FRE incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.


MW204FRE has been designed for use with 200mm Round Ducting.

Manufacturer:	Verplas Ltd
Part Number:	MW204FRE
Size:	200mm Diameter
For use with:	200mm Ducting
Box quantity:	7
Individual Weight:	635g
Colour:	White

FIRE RATING

60 Minutes

PERFORMANCE CURVE

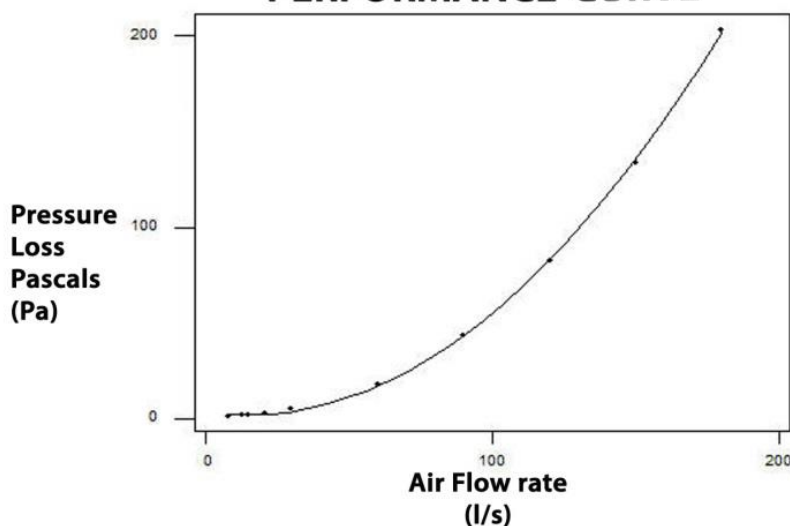

*Pressure losses with Control Disk 10mm open

Associated Ancillaries

200mm Round Ceiling Vent Diffuser

 VKC370F

200mm to 150mm Round Reducer

 VKC436

200mm Stainless Steel Ceiling Valve

 SS204

200mm White Metal Ceiling Extract Valve

 MW204

200mm Fire Rated Supply Valve

 MW205FRS

AIRFLOW	RESISTANCE
8 l/s	1.20 pa
13 l/s	1.70 pa
21 l/s	3.00 pa
30 l/s	5.10 pa
60 l/s	17.90 pa
120 l/s	82.70 pa