


# PRODUCT DATA SHEET


## MW204FRE

FIRE RATED WHITE METAL CEILING AIR EXTRACT VALVE

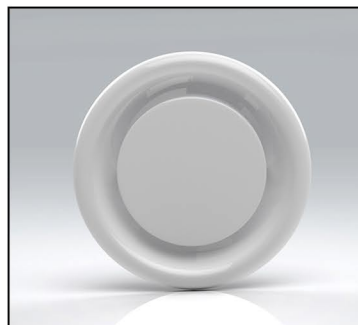

BEFORE A FIRE

SEALED AFTER  
A FIRE

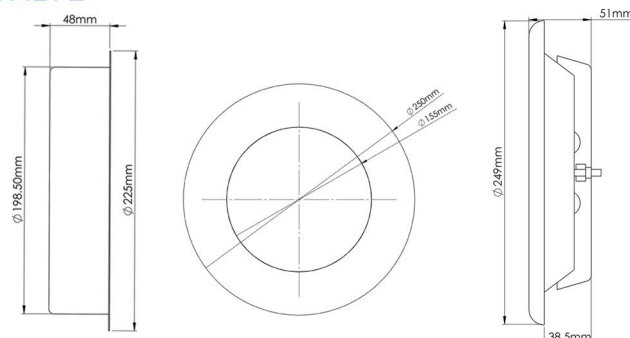

MANUFACTURER:	VERPLAS LTD
PART NUMBER:	MW204FRE
SIZE:	200mmØ
FOR USE WITH:	200MM DUCTING
BOX QUANTITY:	7
INDIVIDUAL WEIGHT:	635g
COLOUR	White
FIRE RATING	60 Minutes

### SPECIFICATION DETAILS

The MW204FRE 200mm diameter Round Fire Rated Extract Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside 200mm Round Duct.

The MW204FRE Extract Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The MW204FRE incorporates an integral intumescent material and has been fire tested to BS EN 1365-2:2014 with 60 minute rating for ceilings.

MW204FRE has been designed for use with 200mm Round Ducting.

### AIRFLOW RESISTANCE

8 l/s	1.20 pa
13 l/s	1.70 pa
21 l/s	3.00 pa
30 l/s	5.10 pa
60 l/s	17.90 pa
120 l/s	82.70pa

### PERFORMANCE CURVE

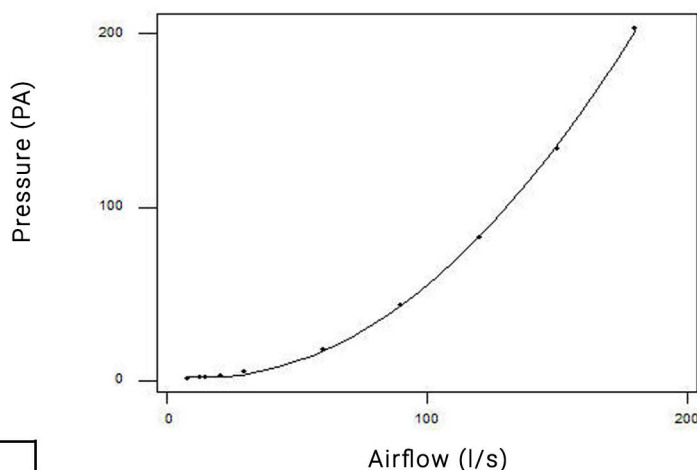

### Associated Ancillaries

MW205  
200mmØ  
Supply Valve

MW204  
200mmØ  
Extract Valve

MW205FRS  
200mmØ Fire  
Rated Supply Valve

