


# PRODUCT DATA SHEET


## MW205FRS

FIRE RATED WHITE METAL CEILING AIR SUPPLY VALVE

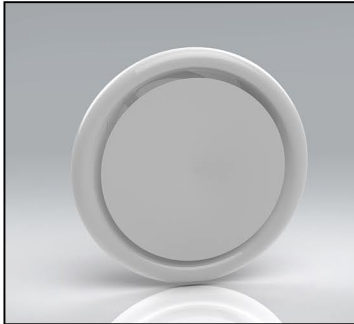

BEFORE A FIRE

SEALED AFTER A FIRE

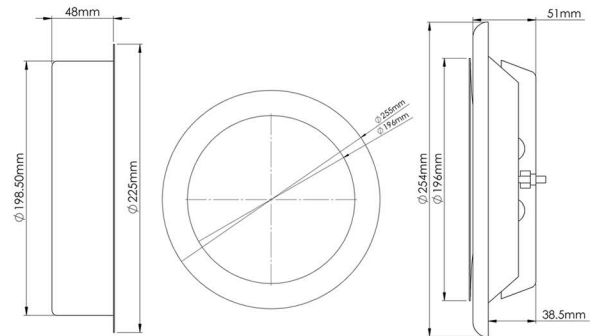

|                    |               |
|--------------------|---------------|
| MANUFACTURER:      | VERPLAS LTD   |
| PART NUMBER:       | MW205FRS      |
| SIZE:              | 200mmØ        |
| FOR USE WITH:      | 200MM DUCTING |
| BOX QUANTITY:      | 7             |
| INDIVIDUAL WEIGHT: | 715g          |
| COLOUR             | White         |
| FIRE RATING        | 60 Minutes    |

### SPECIFICATION DETAILS


The MW205FRS 200mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside 200mm Round Duct.

The MW205FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.

The MW205FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2:2014 with 60 minute rating for ceilings.

MW205FRS has been designed for use with 200mm Round Ducting.

| AIRFLOW | RESISTANCE |
|---------|------------|
| 8 l/s   | 1.90 pa    |
| 13 l/s  | 2.80 pa    |
| 21 l/s  | 4.80 pa    |
| 30 l/s  | 8.30 pa    |
| 60 l/s  | 29.00 pa   |
| 120 l/s | 134.00pa   |

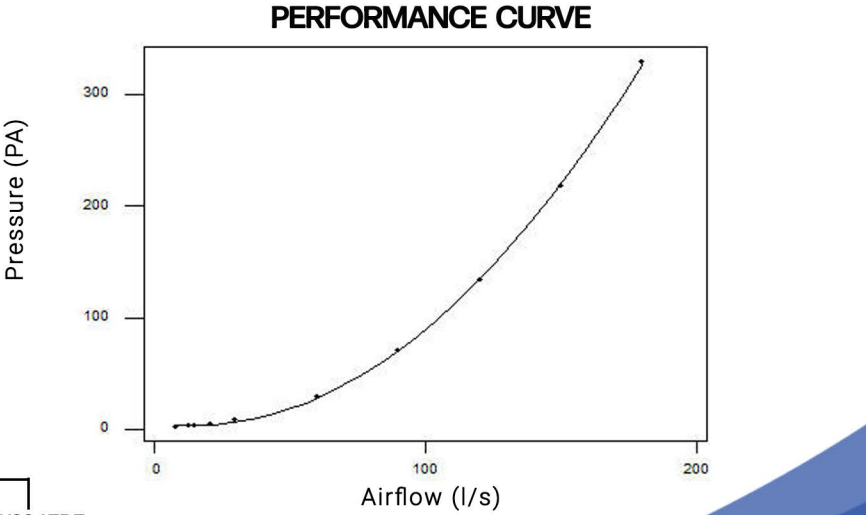

### Associated Ancillaries

MW205  
200mmØ  
Supply Valve

MW204  
200mmØ  
Extract Valve

MW204FRE  
200mmØ Fire  
Rated Extract Valve

