
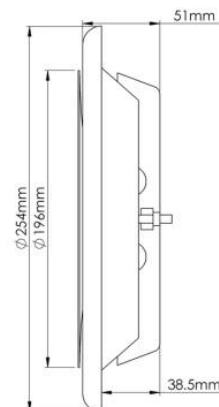



**PRODUCT DATA SHEET**

**MW205FRS**

**FIRE RATED SUPPLY VALVE**

**W** RAL9010

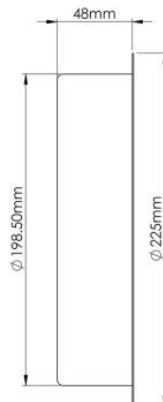

**SPECIFICATION DETAILS**

The MW205FRS 200mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside 200mm Round Duct.

The MW205FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.

The MW205FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.


MW205FRS has been designed for use with 200mm Round Ducting.

<b>Manufacturer:</b>	Verplas Ltd
<b>Part Number:</b>	MW205FRS
<b>Size:</b>	200mm Diameter
<b>For use with:</b>	200mm Ducting
<b>Box quantity:</b>	7
<b>Individual Weight:</b>	715g
<b>Colour:</b>	White

**FIRE RATING**

**60 Minutes**

**PERFORMANCE CURVE**

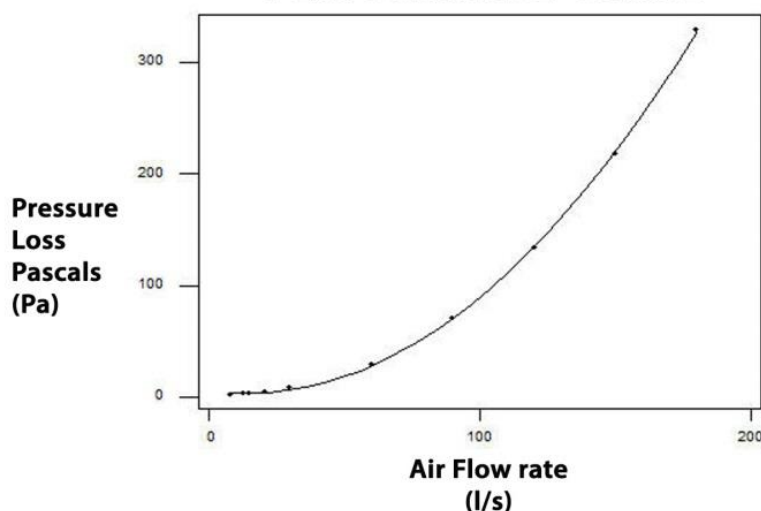

\*Pressure losses with Control Disk 10mm open

<b>AIRFLOW</b>	<b>RESISTANCE</b>
8 l/s	1.90 pa
13 l/s	2.80 pa
21 l/s	4.80 pa
30 l/s	8.30 pa
60 l/s	29.00 pa
120 l/s	134.00 pa

**Associated Ancillaries**

200mm Round Ceiling Vent Diffuser  
  
 VKC370F

200mm to 150mm Round Reducer  
  
 VKC436

200mm Stainless Steel Ceiling Valve  
  
 SS204

200mm White Metal Ceiling Extract Valve  
  
 MW204

200mm Fire Rated Extract Valve  
  
 MW204FRE