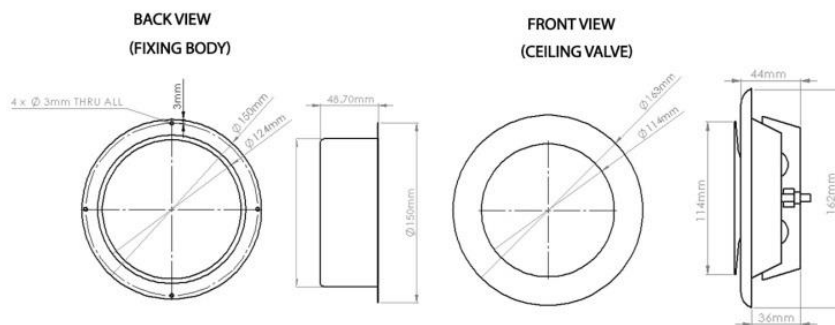


# PRODUCT DATA SHEET

## MW125FRS

### FIRE RATED SUPPLY VALVE

**W** RAL9010


## SPECIFICATION DETAILS

The MW125FRS 125mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 125 duct.


The MW125FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.

The MW125FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.

MW125FRS has been designed for use with Verplas System 125 Round.

**FIRE RATING**
**60 Minutes**
**Manufacturer:**
**Verplas Ltd**
**Part Number:**
**MW125FRS**
**Size:**
**125mm Diameter**
**For use with:**
**Verplas System 125**
**Box quantity:**
**7**
**Individual Weight:**
**334g**
**Colour:**
**White**

## PERFORMANCE CURVE

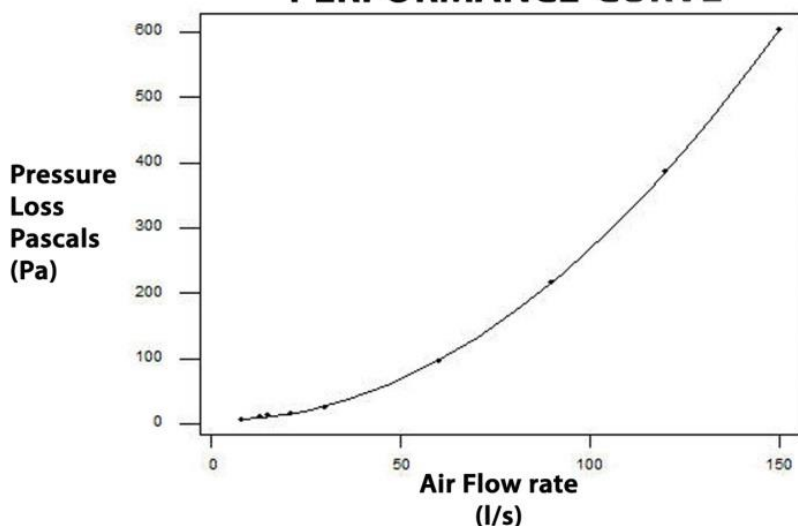

\*Pressure losses with Control Disk 10mm open

## Associated Ancillaries

**125mm 2m Round Pipe**

**VKC2692**
**125mm Round Pipe Connector**

**VKC355**
**125mm Fire Rated Extract Valve**

**MW124FRE**
**125mm Pipe to Pipe Self-Seal Coupling**

**VSSC125PP**
**125mm Pipe to Fitting Self-Seal Coupling**

**VSSC125PF**