



# PRODUCT DATA SHEET

## VKC247G

### 110X54MM AIRBRICK ADAPTOR WITH GRILLES

<b>W</b>	RAL9010
<b>B</b>	RAL8017
<b>BE</b>	RAL1001
<b>T</b>	RAL2001

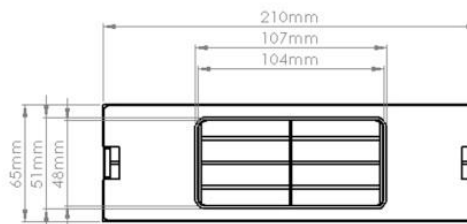

## SPECIFICATION DETAILS

The VKC247G 110x54mm Rectangular Airbrick Adaptor with 204x60mm spigot which is manufactured from (white) High Impact Polystyrene. The 110x54mm rectangular spigot has a minimum free area of 5,424mm<sup>2</sup> with a female adaptor for connection outside of the Rectangular System 100 duct. The 204x60mm spigot has a minimum free area of 11,452mm<sup>2</sup> with a male spigot for connection inside of the System 204 duct.

VKC247G is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.


VKC247G has been designed for use with Verplas Rectangular System 100 or 204.

#### MAX/MIN OPERATING TEMPERATURES

+ 60°C to - 15°C

<b>Manufacturer:</b>	Verplas Ltd
<b>Part Number:</b>	VKC247G
<b>Size:</b>	110mm x 54mm to 204mm x 60mm
<b>For use with:</b>	Verplas System 100
<b>Box quantity:</b>	20
<b>Individual Weight:</b>	140g
<b>Colour:</b>	White

## PERFORMANCE CURVE

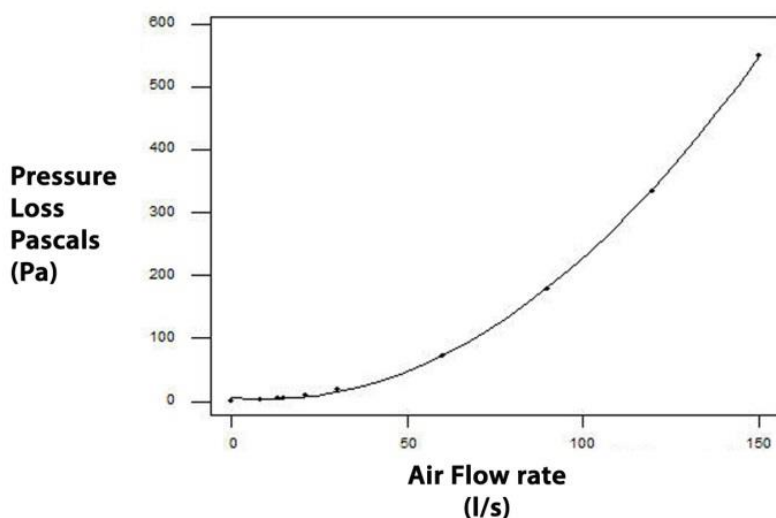

AIRFLOW	RESISTANCE
8 l/s	2.00 pa
13 l/s	5.50 pa
21 l/s	11.00 pa
30 l/s	18.40 pa
60 l/s	71.90 pa
120 l/s	335.00 pa

110x54mm Flat Channel 2m



110x54mm Rectangular Connector



110x54mm Rectangular Wall Plate



110x54mm Rectangular Equal T Piece



110x54mm Rectangular Vertical 90° Bend

