



PRODUCT DATA SHEET

VKC280

150MM ROUND COWLED OUTLET C/W NON-RETURN FLAP



- W** RAL9010
- B** RAL8017
- BE** RAL1001
- T** RAL2001

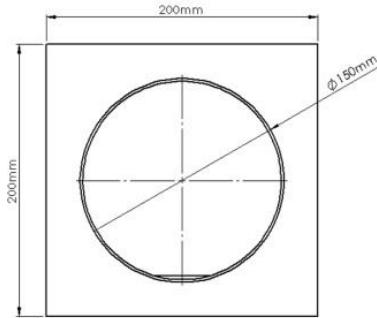

SPECIFICATION DETAILS

The VKC280 150mm diameter Cowled Outlet with Non-Return Flap Round Spigot is manufactured from High Impact Polypropylene and has a minimum free area of 16,000mm<sup>2</sup>. It has a male spigot for connection inside of the System 150 duct.

The VKC280 is designed for installation on exposed external walls where wind or back pressure against the ventilation unit are present. The cowled outlet is designed to shield the duct from the wind and deflect the air away. The non-return flap acts as an additional measure to prevent airflow returning through the duct. As the fan operates the flap lifts to allow the exhaust air to disperse into the atmosphere. VKC280 is designed for exhaust air only.


VKC280 is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VKC280 has been designed for use with Verplas System 150 Round.

Manufacturer:	Verplas Ltd
Part Number:	VKC280
Size:	150mm Diameter
For use with:	Verplas System 150
Box quantity:	10
Individual Weight:	300g
Colour:	White, Brown, Beige & Terracotta

MAX/MIN OPERATING TEMPERATURES	+ 60°C to - 15°C
--------------------------------	------------------

PERFORMANCE CURVE

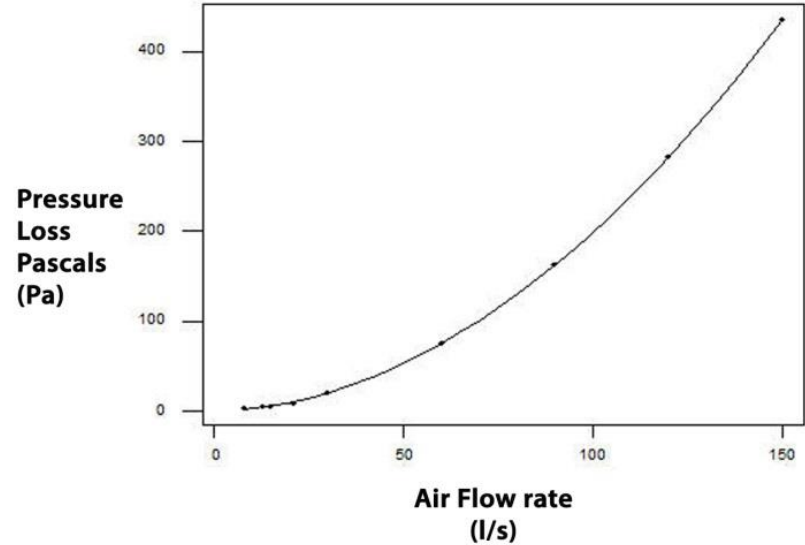

AIRFLOW	RESISTANCE
8 l/s	4.00 pa
13 l/s	4.70 pa
21 l/s	6.40 pa
30 l/s	8.00 pa
60 l/s	14.50 pa
120 l/s	33.00 pa

Associated Ancillaries

