


# PRODUCT DATA SHEET

## FAB220x90



### Fire Safe Air Brick 220x90mm Transition

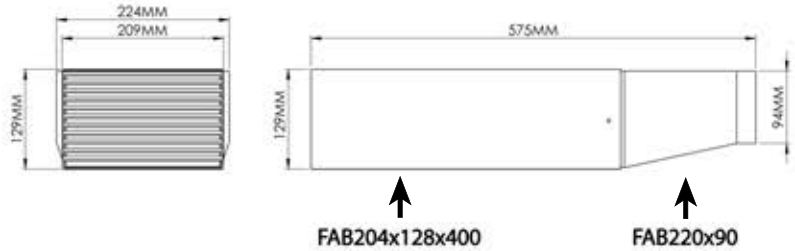

**W** RAL9010

<b>MANUFACTURER:</b>	<b>VERPLAS LTD</b>
<b>PART NUMBER:</b>	<b>FAB220x90</b>
<b>SIZE:</b>	<b>SYS220</b>
<b>FOR USE WITH:</b>	<b>VERPLAS SYSTEM 220</b>
<b>BOX QUANTITY:</b>	<b>1</b>
<b>INDIVIDUAL WEIGHT:</b>	<b>1.4kg</b>
<b>COLOUR</b>	<b>White</b>

### SPECIFICATION DETAILS

The Verplas Fire Safe Air Bricks is designed to be build into external wall types during construction.

The Fire Safe Air Brick is non-combustible as set out in Approved Document B ( Fire safety)


Manufactured from 1mm electrogalvanized sheet steel and polyester powder coating meeting EN 13501-1 Class A2-S1,0Ø

Corrosion resistance- salt spray tested to BS EN ISO 927:2012

For use with FAB204x128x400

FAB220X90 + FAB204X128X400	AIRFLOW	EXTRACT	SUPPLY
	8 l/s	0.45	0.28
	13 l/s	0.92	0.41
	21 l/s	2.07	0.68
	30 l/s	3.97	1.05
	60 l/s	14.85	2.89
	120 l/s	57.67	9.27

### PERFORMANCE CURVE

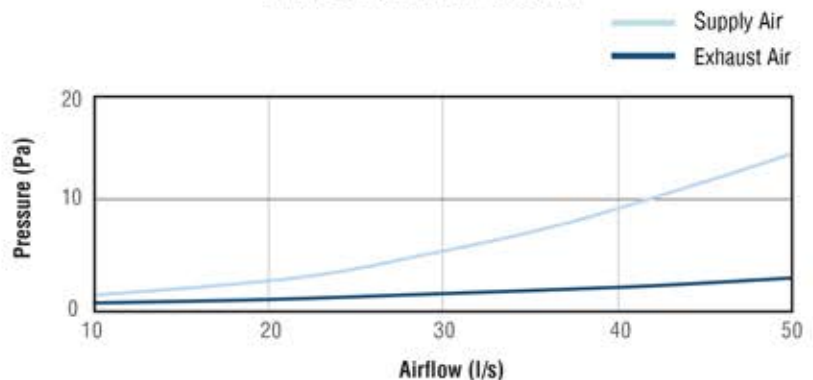

### Associated Ancillaries



[Sales@Verplas.co.uk](mailto:Sales@Verplas.co.uk)  
[www.Verplas.co.uk](http://www.Verplas.co.uk)  
 +44 (0) 1202 825898

View the Full Range

