

PRODUCT DATA SHEET

VKC5733G

DOUBLE AIRBRICK ADAPTOR C/W GRILLES




- W

RAL9010
- B

RAL8017
- BE

RAL1001
- T

RAL2001

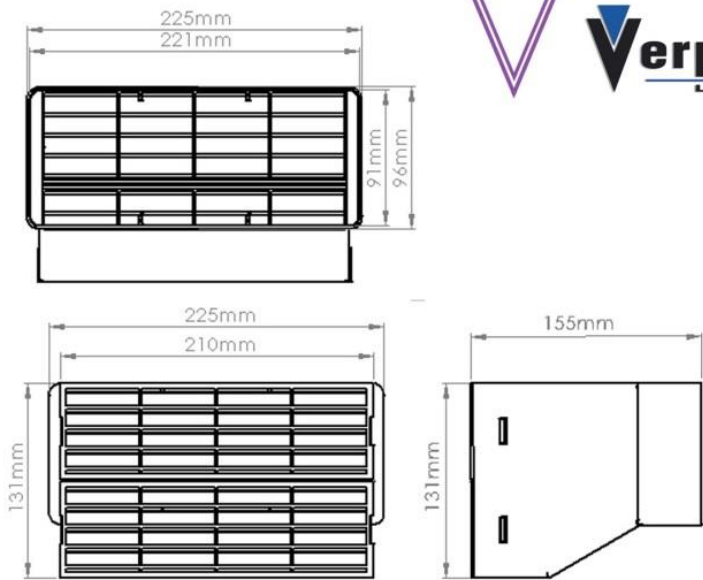

SPECIFICATION DETAILS

The VKC5733G 220x90mm Rectangular Double Airbrick Adaptor with Grilles is manufactured from (white) High Impact Polystyrene and has a minimum free area of 15,360mm<sup>2</sup>. It has a female adaptor for connection outside of the System 220 duct.

The VKC5733G is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

VKC5733G is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VKC5733G has been designed for use with Verplas System 220.

MAX/MIN OPERATING TEMPERATURES

+ 60°C to - 15°C

Manufacturer:

Verplas Ltd

Part Number:

VKC5733G

Size:

220mm x 90mm

For use with:

Verplas System 220

Box quantity:

5


Individual Weight:

332g

Colour:

White

PERFORMANCE CURVE

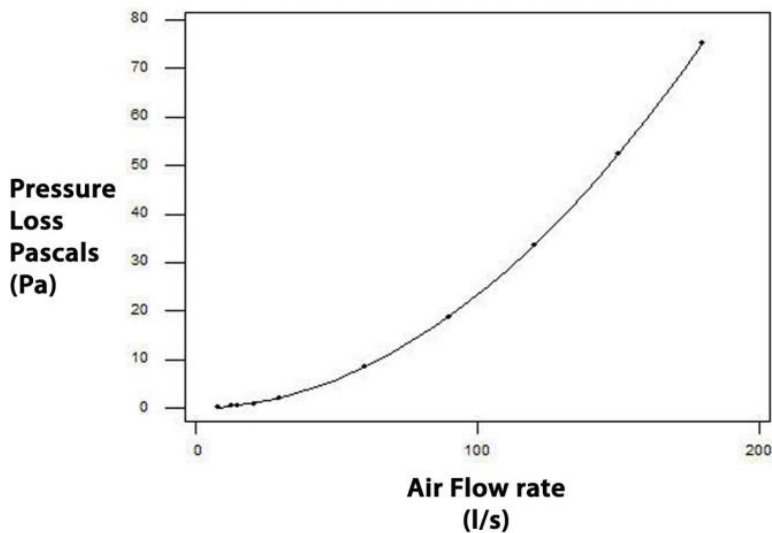

AIRFLOW

RESISTANCE

8 l/s

0.31 pa

13 l/s

0.60 pa

21 l/s

1.08 pa

30 l/s

2.20 pa

60 l/s

8.50 pa

120 l/s

33.70 pa

Associated Ancillaries

